

# TCX645HD


## Heavy Duty Tire Changer

**HUNTER**  
Engineering Company

### SITE REQUIREMENTS / KEY SPECIFICATIONS

SITE REQUIREMENTS	
Operating Voltage	230V, 3 ph, 60Hz, 26A
Shipping Weight	1631 lbs (740 kg)
Width (W)	80-94 in. (2032-2388 mm)
Height (H)	37-61 in. (940-1550 mm)
Depth (D)	64-83 in. (1626-2108 mm)

SPECIFICATIONS	
Wheel Assembly	
Max. Diameter	90.5 in. (2299 mm)
Max. Width	42 in. (1067 mm)
Max. Weight	2200 lbs. (1000 kg)
Min. rim-center hole diameter	3.94 in (100 mm)
Max. rim diameter	46 in. (1168 mm) up to 56 in. with optional accessories
Match Mounting Capable	Yes
Torque; Low/High Speed	3172 ft-lbs (4300 nm) 2213 ft-lbs (3000 nm)
Rotation Speed	10 rpm and 5 rpm

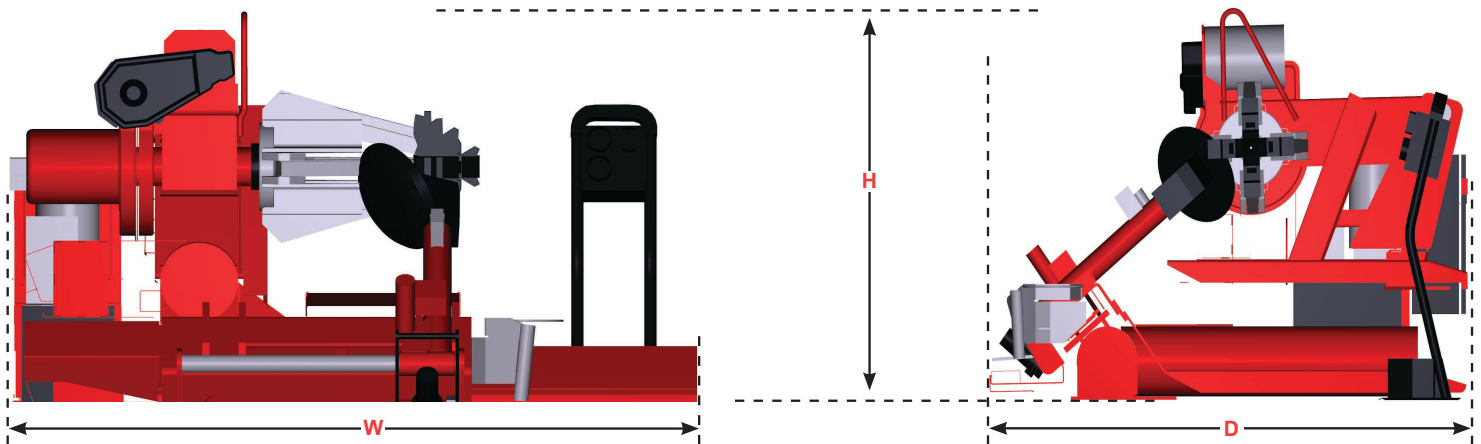

### MODEL ACCESSORIES



TCX645HD Shown

ACCESSORIES	TCX645HD
Alloy Wheel Clamp	✓
Drop Center Skidder Clamp	✓
Steel Wheel Pliers	✓
Aluminum Wheel Pliers	✓
Lubricant & Application Brush	✓
Standard Lever	✓
Bead Lever	✓

For tire changer information visit:  
[www.hunter.com/tire-changers](http://www.hunter.com/tire-changers)

For general inquiries visit:  
[www.hunter.com](http://www.hunter.com) or call 800-448-6848

For local contact visit:  
[www.hunter.com/contact-hunter](http://www.hunter.com/contact-hunter)

Because of continuing technological advancements, specifications, models and options are subject to change without notice.

Form CS07811-00, 07-20  
Supersedes Form 7696-T, 06-19  
Copyright © 2020, Hunter Engineering Company